

## DTS 3661 (NEMA 3R/4) | DTS 3681 (NEMA 4/4X)

- suitable for the food and beverage industry and outdoor applications
- high protection system IP 56, maintenance-free in most applications
- maintains a UL tested NEMA type 3R/4 seal against the enclosure
- condenser with 3 mm fin spacing, highly effective protection against strongly contaminated ambient air
- large distance between intake and exhaust vents, safe circulation within the electrical enclosure due to long passage of air, therefore hot spots are eliminated
- integrated condensate evaporation system
- fully coated heat-exchangers and tubing



PRODUCT		DTS 3661 (NEMA 3R/4)	DTS 3681 (NEMA 4/4X)	UNIT
ARTICLE NO.	SC	13383936355	13383936158	
ARTICLE NO.	LAP <sup>1</sup>	13383936365	13383936168	

DATA				
Rated voltage ±10 %			AC 50   60	Hz
			400   460 3~	V
Cooling capacity according to EN 14511	A35/A35	5490		W
	A35/A50	4431		
Power consumption	A35/A35	2920		A
Current consumption	A35/A35	6.3		
Starting current	A35/A35	25		
Unimpeded airflow (free flow)	internal	2365	2740	m³/h
	external	2365	2740	
Pre fuse T			15	A
Type of connection	internal connection			
Noise level according to EN ISO 3741	< 73			dB (A)
Weight (without packaging)		108	109	kg
Ambient temperature	SC	0 ... +55   + 32 ... + 131		°C   °F
	LAP	- 40 ... + 55   - 40 ... + 131		
Control range (adjustable)	+ 25 ... + 45   + 77 ... + 113; factory setting + 35   + 95			
Refrigerant	R134a	1300		g
Duty cycle	100			%
Condensate management	integrated condensate evaporation system with safety overflow			
Protection system according to NEMA type	3R/4	towards the electrical enclosure if used as intended by the manufacturer	-	
	4/4X	-	towards the electrical enclosure if used as intended by the manufacturer	
	1	towards the surroundings if used as intended by the manufacturer		
Design	housing	galvanised sheet steel	galvanised sheet steel	
	cover	galvanised   electrostatically powder coated (200 °C)	stainless steel 304	
Colour	RAL 7035   different colours available on request		-	


<sup>1</sup> LAP (Low Ambient Package): to ensure proper operation of cooling cycle at low ambient temperatures. For additional information to ensure the accurate setting of the motor protection switch, please see technical specific data sheet. This information is included with the delivery of the unit or can be found at [www.pfannenber.com](http://www.pfannenber.com).

ACCESSORIES	Piece	ARTICLE NUMBER
Condensate bottle	1	18314000100
Filter kit	1	18881500004

For additional models, options and voltages visit [www.pfannenberg.com](http://www.pfannenberg.com) or contact us directly.



### Cooling capacity performance curves

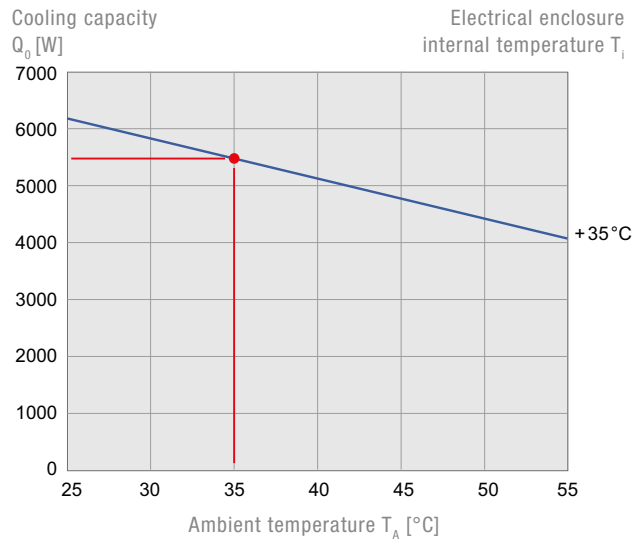

### Dimensions

	X	Y	Z	A	B	C	D	E	F	G	H	I	J	K	L
mm	485	1665	520	635	350	285	360	35	240	350	139	420	210	425	28.5

Mounting holes  $\varnothing$  10 mm

### DTS 3661 | DTS 3681

