


Flush box for air conditioning pre-installation. With independent and reversible evacuator with vertical water outlet. Also with sealed box ref. 665 to make connections.

Flush box for air conditioning pre-installation. With independent and reversible evacuator with vertical water outlet. Also with sealed box ref. 665 to make connections. IP40. IK07. Dimensions 430 x 147 x 65 mm. 30 inputs for tube Ø 32 mm. With central anti-deformation partition. Cover with plastic claw with option to put screws simultaneously.

Common applications: Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)

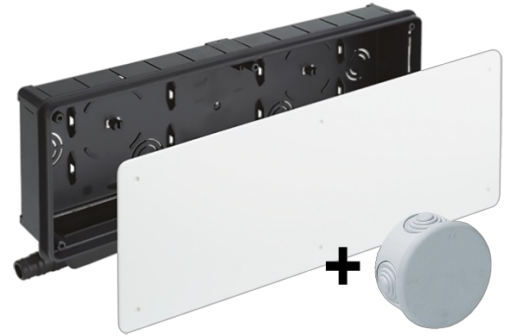

Features

Enclosure type	Connection and derivation
Installation method	Flush in work
Use	Domestic / Tertiary
Location type	Inside
Dimensions inside (mm) (Width x Height x Depth)	430x147,5x65
Case material	Insulation
Case color	Black
Ticket type	Unfathomable
No. of inlets and size (mm)	30xØ32
Lid closure system	Metal claw
Drain type	Horizontal
With grommets at the bottom to fix the tubes or cables with cable ties, quantity	Yes

Technical data

Protection Degree (IP)	IP40
Protection Degree (IK)	IK07

Impact shock resistance	Medium
Insulation class	Class II
Fire resistance (GWT)	650°C
Ambient operating temperature	-5°C ->+60°C
Work stress	400 Vca
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-22
According to REBT	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

Sustainability

According to European Directive 2011/65/UE (RoHS)	Not applicable
---	----------------